


Technical Data Sheet

Drain CONNECTO CAN15BC

Product description

Drainage channels with gratings of length 200 mm, of class B125 complying with the standard NF-EN 1433, holding the EC marking and in compliance with the order of 31/05/94 concerning the accessibility of mobility impaired people, assembled via a male/female joint system with locking.


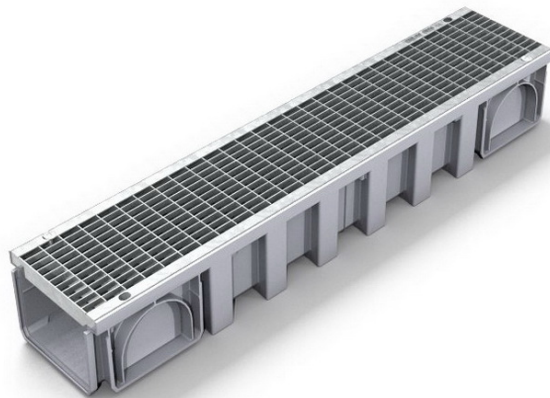


It is comprised of:

- a body in injected Polypropylene Grey, of length 1 ml, with PP rabbet.
- one grating Galvanised steel grating class B125 at recessed locked.

Technical Characteristics

- Resistance class: B125
- Effective width: 160 mm
- Effective depth: 110 mm
- Grating type: recessed
- Drainage surface: 1230 cm²/ml
- Opening dimensions: 15 / 30 mm
- Weight: 8,2 KG



Nicoll is certified
ISO9001v2008 and ISO14001v2004



Technical assistance
02.41.63.73.25

Fastening the gratings

Fastening the gratings Galvanised steel grating accomplished with two zinc-plated pan head screws and two Zamac inserts.

Related products

End cap/Outlet (at end of drain):

➤ **NAT188 : End/Cap Outlet (end or lateral)**

PVC End cap/Outlet base GREY Ø 100 for CONNECTO CAN188 / CAN15BC / CAN15BF drains, designed to join together at each end of the drain or on side sockets after uncapping.

➤ **NAV188 : End/Cap Outlet (end or lateral)**

PVC End cap/Outlet base GREY Ø 110 for CONNECTO CAN188 / CAN15BC / CAN15BF drains, designed to join together at each end of the drain or on side sockets after uncapping.

➤ **NAX188**



Tappings:

➤ **STCAN : Tapping (vertical)**

PVC GREY Tapping for vertical outlet Ø 100 (connection to storm drain), designed for all of the drains in the CONNECTO range.

➤ **SVCAN : Tapping (vertical)**

PVC GREY Tapping for vertical outlet Ø 110 (connection to storm drain), designed for all of the drains in the CONNECTO range.

➤ **SXCAN : Tapping (vertical)**

PVC GREY Tapping for vertical outlet Ø 100 (connection to storm drain), designed for all of the drains in the CONNECTO range.



Sand trap

➤ **PSCVT : Sand trap**

GREY PVC Sand Trap, for CONNECTO drains - width 130 and 200, with PVC basket and outlet connection Ø 100. Designed to trap sand and floating matter, it is mounted directly on the vertical outlet of the drain. Its modular design allows for flexibility in vertical positioning and a 360° orientation for the outlet, to simplify installation.

➤ **PSCVV : Sand trap**

GREY PVC Sand Trap, for CONNECTO drains - width 130 and 200, with PVC basket and outlet connection Ø 110. Designed to trap sand and floating matter, it is mounted directly on the vertical outlet of the drain. Its modular design allows for flexibility in vertical positioning and a 360° orientation for the outlet, to simplify installation.